KS EVO VS

ENERGY SAVINGS AND VERSATILITY, WITH SILENT OPERATION

Low

Permanent Magnet Motor

Salt water/sea water compatible





Union fittings provided, 50 and 63 mm diameter, to fit in any existing installation



As defined by EN 17645. Go to report pages to see the complete detail by item.

MADE IN EU

PRO LINE

3 YEARS OF WARRANTY

- Variable speed: high efficiency for each application, optimised consumption
- 5 programs, 3 preselected speeds
- Super-silent operation
- Wing-nut closing system, rapid access (no tools required)
- Double drain, easy opening (no tools required)
- Simple installation, direct substitute for KSE pumps
- Impeller and diffuser made of Noryl®, very hard-wearing and corrosion-resistant
- Permanent magnet motor
- Automatic "Skimming" function: cleans the surface every 1, 2 or 3 hours
- Prefilter size: 3.5L

Code	Ref.	HP	P2 (W)	P1 (W)	Amps (A)	A (mm)	Flow rate (m³/h)*	Weight (kg)	Pack. (mm)	Qty/pallet
010925101520	KS Evo VS	1.50	1100	1520	5.9	543	21	15	330 x 255 x 650	25

P1 Input power - P2 Output power * 10 m water column pressure M.O.Q. :1

LPRK Smart retrofit kit: use it with the KS EVO VS to replace easily old pumps on existing installations

SMART RETROFIT KIT

Item	Pumps to replace	Kit content	Kit per box
LPRK	Astral Victoria Plus, Astral Victoria Plus Silent, Saci Winner	Smart Base (1), Fixing screw (3), RC50 (2), O-ring Seal (2)	10

LPRK is valid to retrofit installations Ø50 mm, commonly used for pumps up to 1 HP



Technical Specifications	
Max. water temp. / Max. pressure	50ºC / 2,5 bar
Connection (DIN slip included, for others please ask)	Ø 50 - 1 ½" and Ø 63 - 2"*
Mechanical seal	AISI 316, suitable for salt water
Motor-drive specifications	Class F, IPX5, 50 Hz, single phase
Housing/impeller/strainer/lid	PP + F.G./Noryl®/PP/SAN®

*All bodies have a 2"connection. Possibility of having the 1.5" ANSI connection by adding the code MAINSI15 or 2" with the code MAINSI20, both sold by 100 pcs.
Unit codes also available: 500100251200 - 2 fittings Ø 1-1/2" / 500100252000 - 2 fittings Ø 2"

Single Speed models can be easily replaced with a VS equivalent.

(No need to retrofit or modify hydraulic connections).



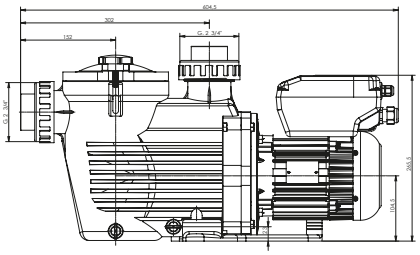

Water column pressure (m)

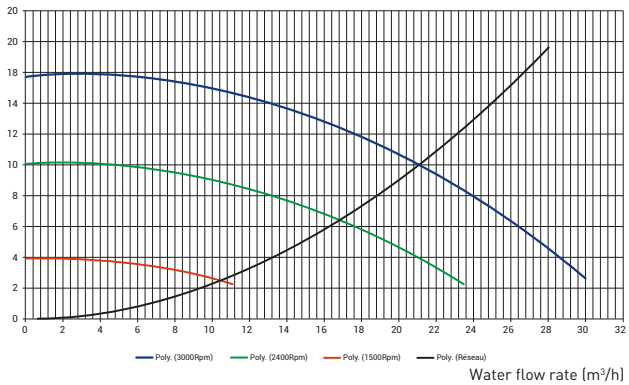

Water flow rate (m³/h)